



[Figure 1]

(1/9)

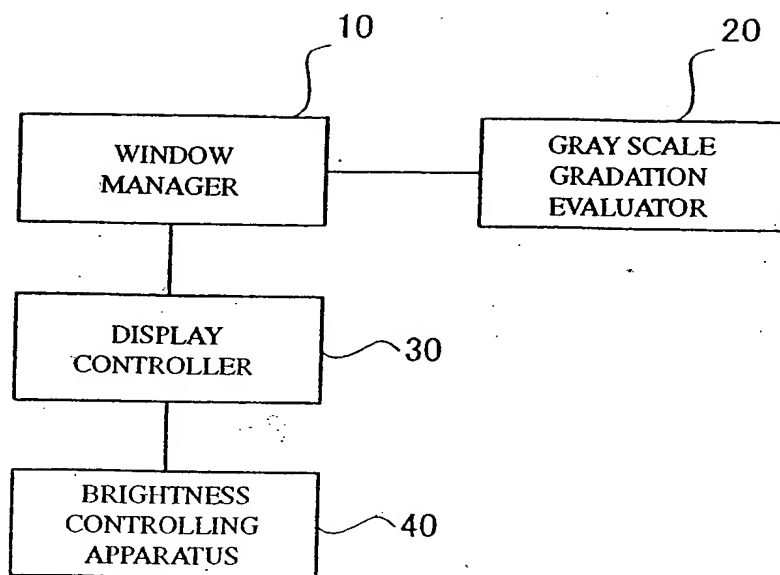


[Figure 2]

(2/9)

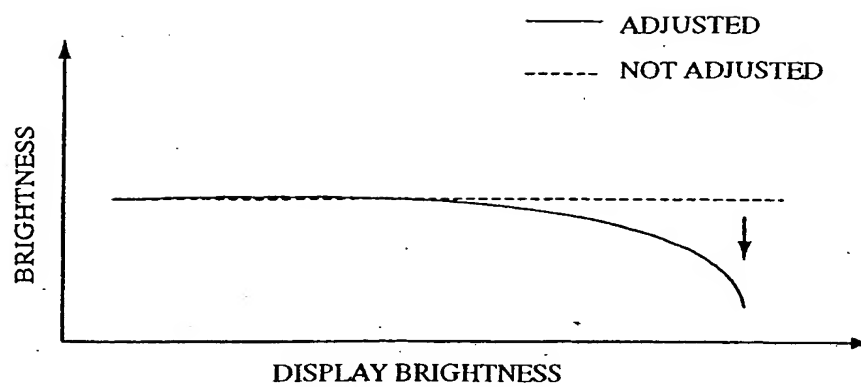


[Figure 3]

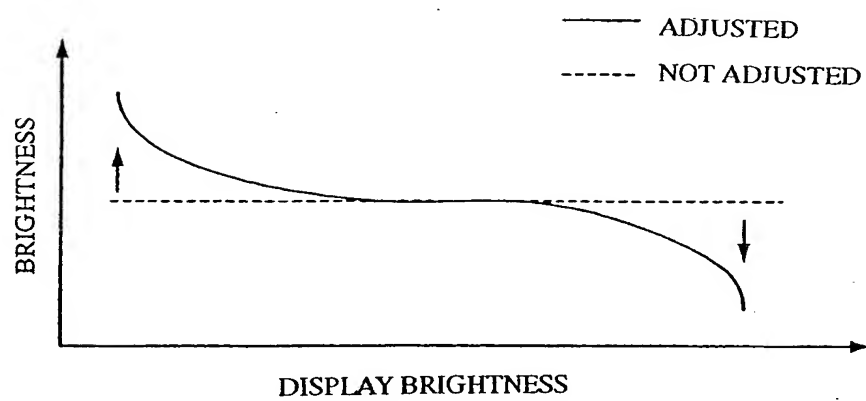

[Figure 4]

(3/9)

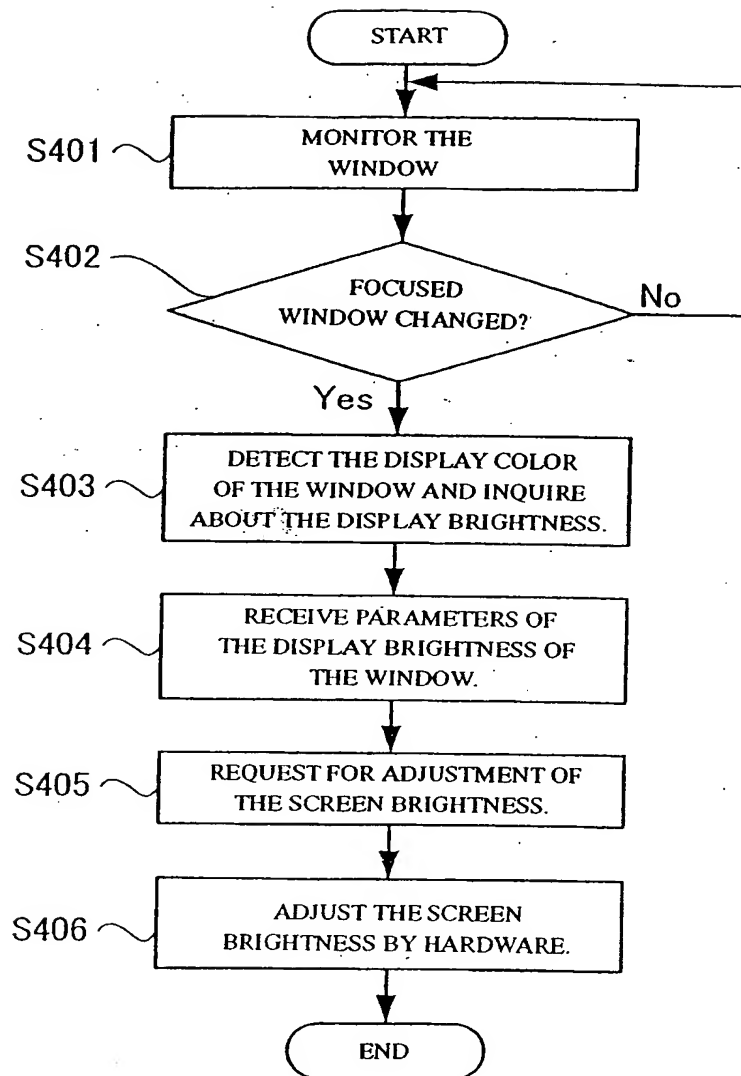

intel

82371AB PCI-TO-ISA / IDE XCELERATOR (PIIX4)


- Supported Kits for both Pentium™ and Pentium™ II microprocessors
 - 82430TX ISA Kit
 - 82440LX ISA/DP Kit
 - Multifunction PCI to ISA Bridge
 - Supports PCI at 30 MHz and 33 MHz
 - Supports PCI Rev 2.1 Specification
 - Supports Full ISA or Extended I/O (EIO) Bus
 - Supports Full Positive Decode or Subtractive Decode of PCI
 - Supports ISA and EIO at 1/4 of PCI Frequency
 - Supports both Mobile and Desktop Deep Green Environments
 - 3.3V Operation with 4V Tolerant Buffers
 - Ultra-Low Power for Mobile Environments Support
 - Power-On Suspend, Suspend to RAM, Suspend to Disk, and Soft-OFF System States
 - All Registers Readable and Restorable for Proper Resume from 0V Suspend
 - Power Management Logic
 - Global and Local Device Management
 - Suspend and Resume Logic
 - Supports Thermal Alarm
 - Support for External Microcontroller
 - Full Support for Advanced Configuration and Power Interface (ACPI) Revision 1.0 Specification and OS Directed Power
- Integrated 16 x 32-bit Buffer for IDE PCI Burst Transfers
 - Supports Glue-less "Swap-Bay" Option with Full Electrical Isolation
 - Enhanced DMA Controller
 - Two 82C37 DMA Controllers
 - Supports PCI DMA with 3 PCI/PCI Channels and Distributed DMA Protocols (Simultaneously)
 - Fast Type-F DMA for Reduced PCI Bus Usage
 - Interrupt Controller Based on Two 82C59
 - 15 Interrupt Support
 - Independently Programmable for Edge/Level Sensitivity
 - Supports Optional I/O APIC
 - Serial Interrupt Input
 - Timers Based on 82C54
 - System Timer, Refresh Request, Speaker Tone Output
 - USB
 - Two USB 1.0 Ports for Serial Transfers at 12 or 1.5 Mbit/sec
 - Supports Legacy Keyboard and Mouse Software with USB-based Keyboard and Mouse
 - Supports UHCI Design Guide
 - SMbus
 - Host Interface Allows CPU to Communicate Via SMbus
 - Slave Interface Allows External SMbus Master to Control Resume Events
 - Real-Time Clock

101% 1/284 2159X2794

BEST AVAILABLE COPY

[Figure 6]


(5/9)

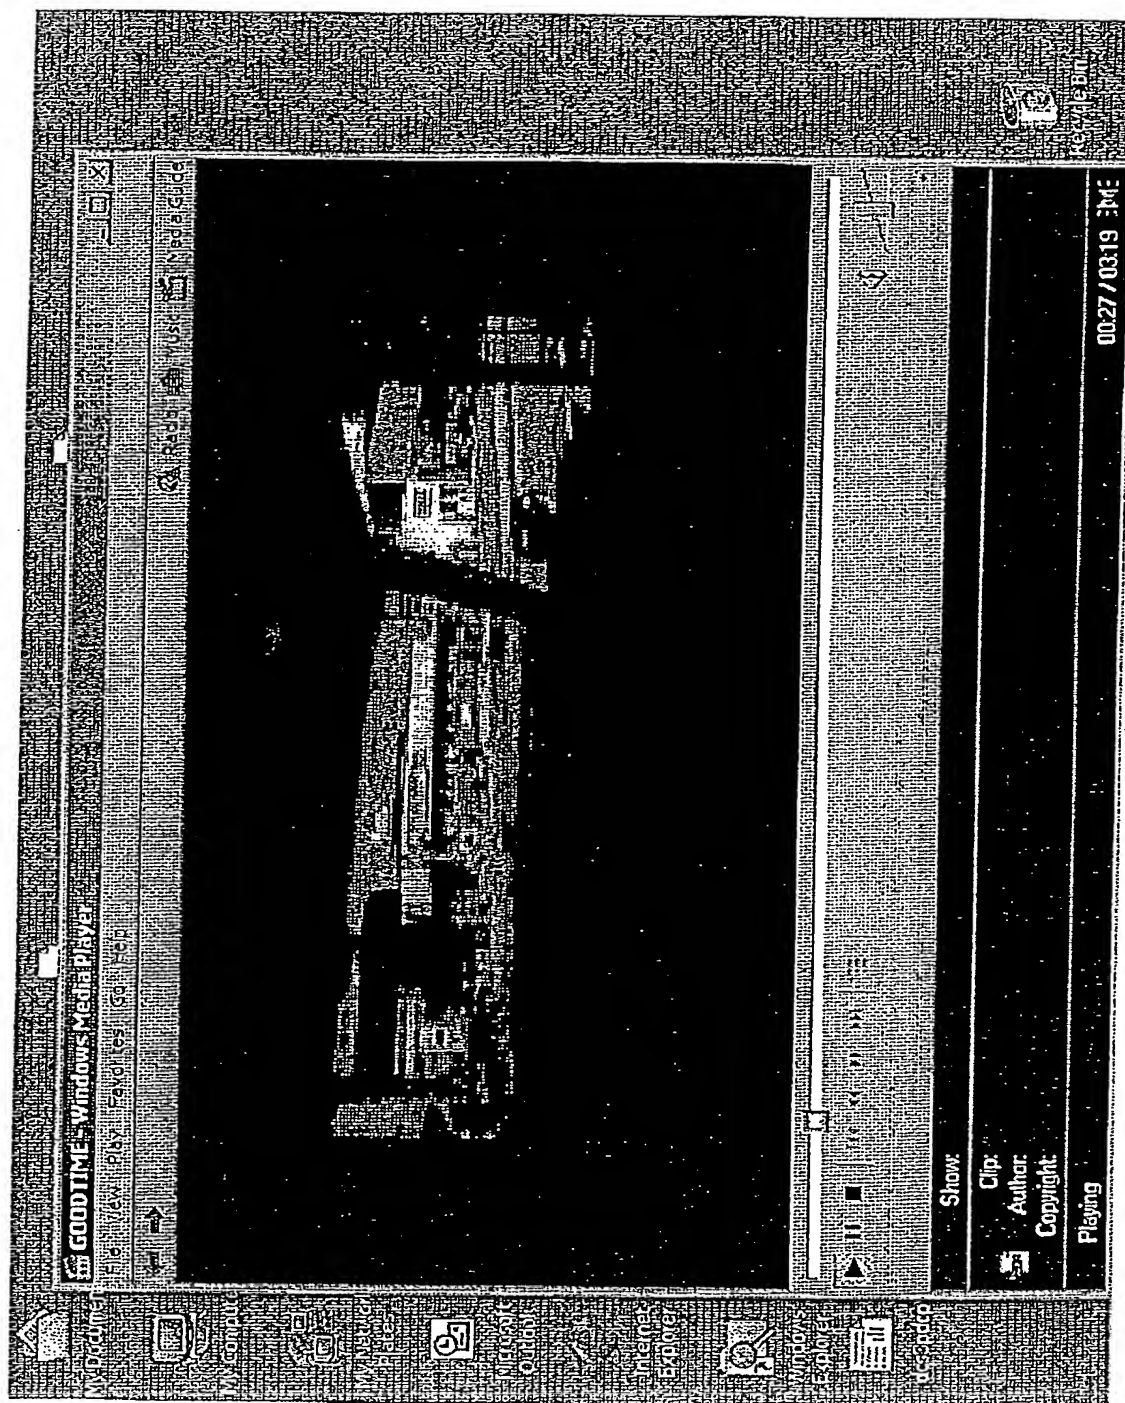

BEST AVAILABLE COPY


[Figure 7]

(6/9)

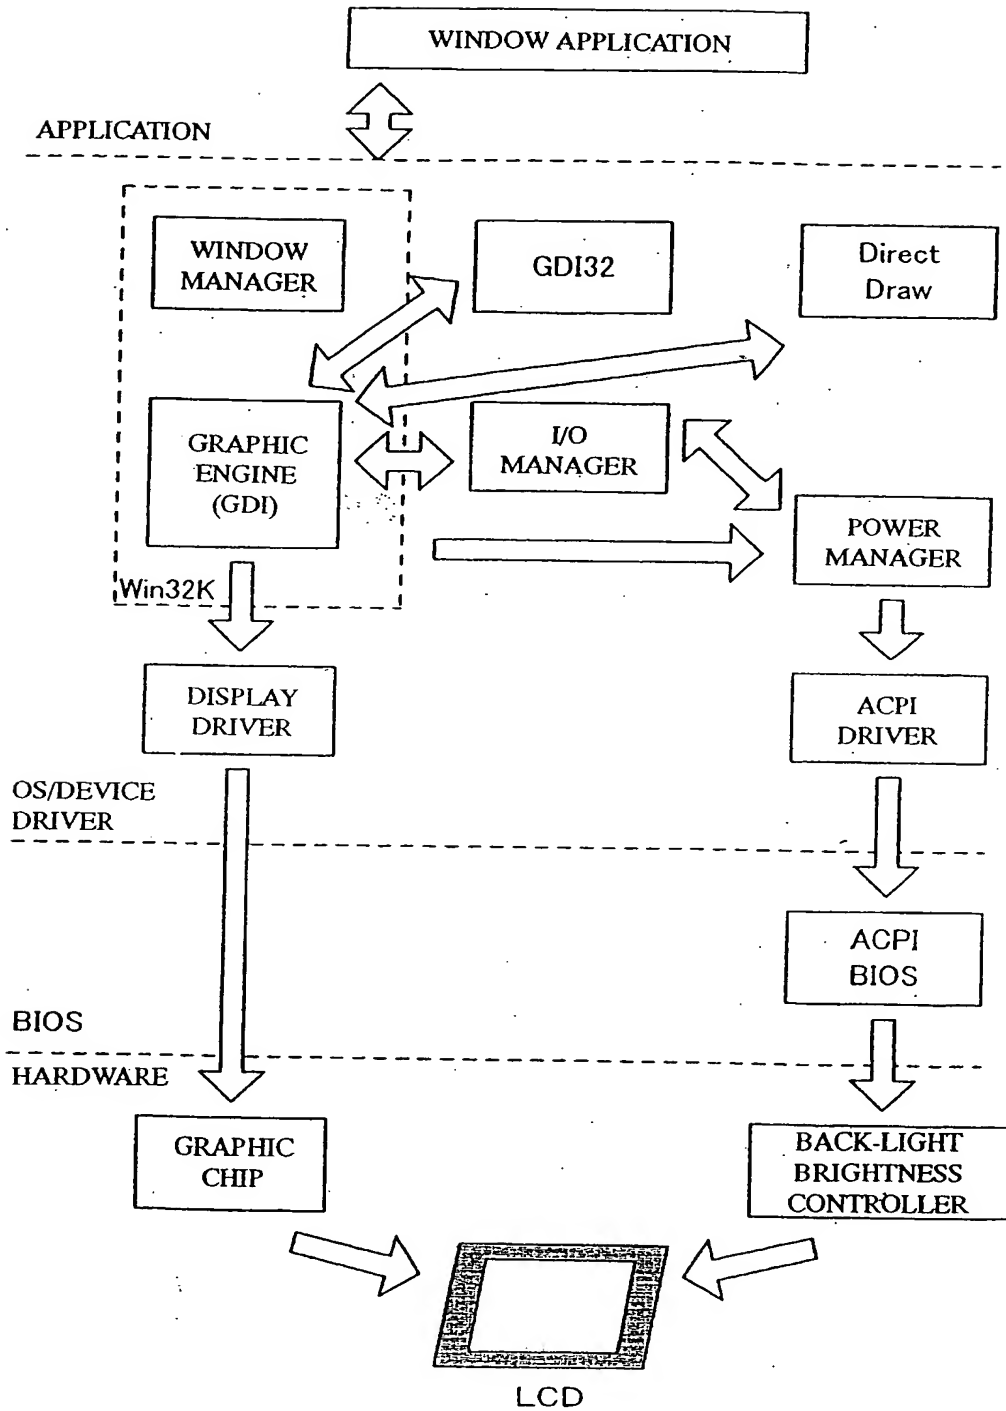


[Figure 8]

(7/9)

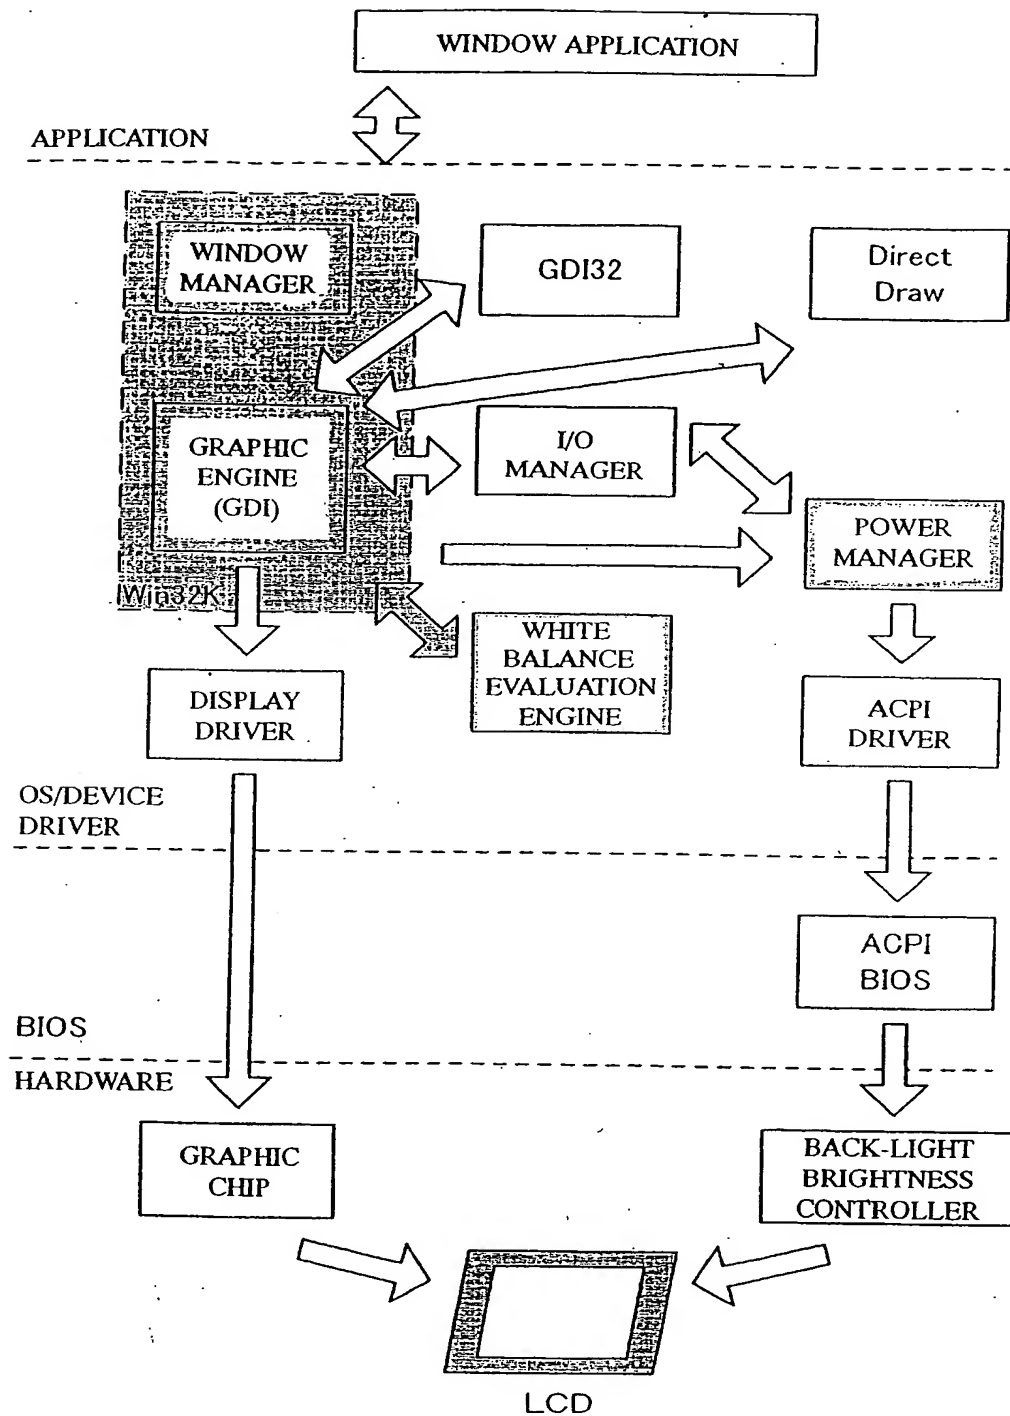

[Figure 9]

(8/9)

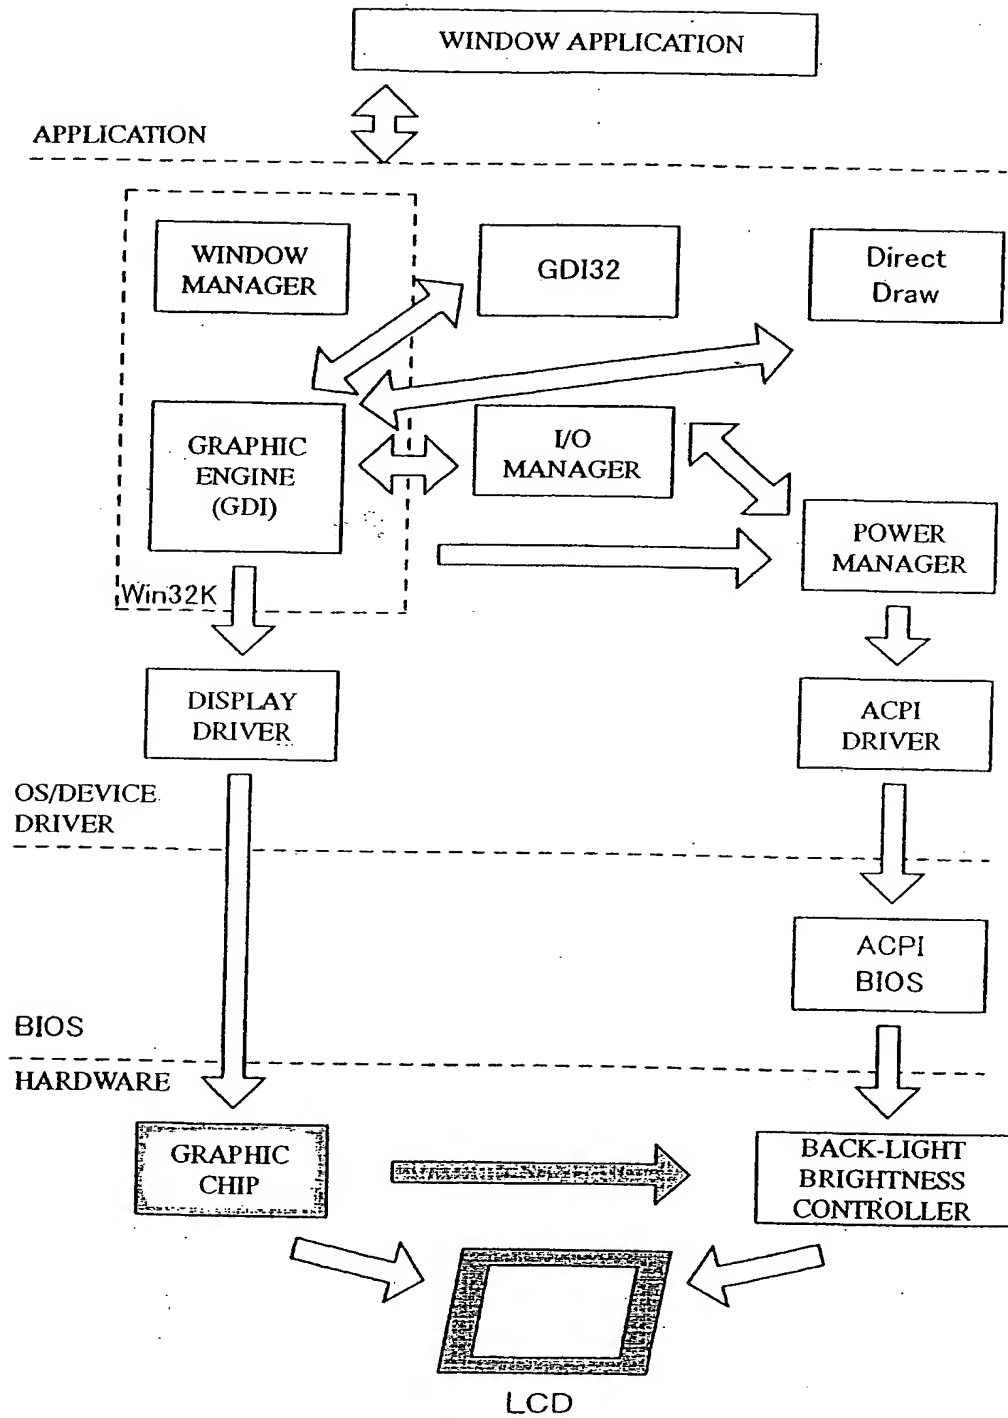

[Figure 10]

(9/9)

